



Luxx 645w LED Pro

USER MANUAL




Thank you for being a part of the Luxx Lighting family. This manual will guide you through the installation and mounting process of the Luxx 645w LED Pro. Please read and understand this manual in its entirety before using the product. Only use this product as specified within the manual.

PRODUCT DESCRIPTION

The Luxx Lighting 645w LED Pro has been developed by assessing SMD (Surface Mount Device) chips and drivers from leading manufacturers in controlled test applications and cultivation facilities for 3+ years. The Luxx 645w LED Pro is made up of Samsung horticulture whites / blues and Osram reds. The respective companies lead the field in LED R&D, delivering high efficiency, reliability and performance. The Luxx 645w LED Pro deploys a lens angle of 120 degrees, from a 6 bar design, with a total of 2,226 diodes. For use in greenhouses or climate-controlled rooms.

PRODUCT INFORMATION AND SPECIFICATIONS

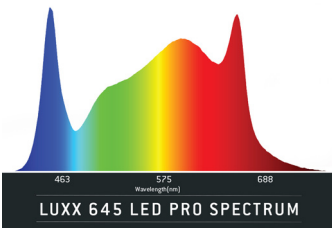

CONTENTS

- Solid Decking Mount
- Lance Hanger (2PCS)
- 10ft Input Power Cord (1PC)
- Controller Splitter (1PC)
- Controller Cable (2PCS)
- Instruction Manual

Physical	
Total Length	1240mm 48.47"
Total Width	1090mm 43.18"
Total Height	70mm 2.75"
Total Weight	13kg 28.6lbs
Performance	
Input Voltage	120-277V
Input Current	5.38A -2.33A
Input Power	645W
Min Power Factor	>0.95%
Thermal Management	Passive
Lifetime	L90: >54,000 hrs
Power Cord	10 ft
Performance Requirements	
Rated Mains Voltage	120-277V
Voltage Range	90-305V
Mains Frequency	50/60Hz
Operation Frequency	50/60Hz



INSTALLATION

Please read the following instructions carefully before using or working with the product

Warning!

- Please have an experienced, certified service personnel mount and install this device, in accordance with the applicable local laws and regulations.
- The user is responsible for correct and safe installation.
- Ensure the existing electrical can support the voltage and current requirements of the LED fixture.
- Avoid coiled cords and keep mains leads separated. This prevents electromagnetic interference.

In order to mount your LED fixture properly, start by identifying a suitable support structure you can mount your fixture on. Common support structures include pallet racks, trusses, structural channels, Unistrut, and rolling tables. For optimal results, we recommend that two people mount this fixture together. Be sure to mount the system to something that can hold the weight of the LED fixture.

UNISTRUT MOUNTING PART LIST

Parts list for mounting the fixture to Unistrut:

- M5 - 0.8 mm fully threaded steel rod
- M5 - 0.8 mm flat washer
- M5 - 0.8 mm hex nut

*Use corrosion resistant hardware.

SOLID DECKING MOUNTING

We suggest hanging the LED fixture from crossbars in a rack system that has solid support guaranteed not to collapse under the weight. To create proper balance, be sure to position the LED fixture parallel to the length of the rack while you're setting up.

Warning! Be sure to mount the system to something that can hold the weight of the LED fixture.

- Using the solid decking mounts, loop each mount across the crossbar above the LED light bar second from the end of either side of the fixture. Use two decking mounts on either end.

Note: Do not attach mounting hardware to the end light bars. You risk damaging the fixture if you do.



- Once all four decking mounts are in place, lift the LED fixture up and mount it on the decking mounts. You can do this by carefully prying apart the hooks until there is enough room to slide the fixture between the decking mounts and they will hook around the fixture.
- Adjust the LED fixture so that each decking mount makes as much surface contact with the fixture as possible.
- Now that the fixture is secured to the decking mounts, you can adjust the position of the lights by sliding the decking mounts across the crossbars and settle it in the appropriate location for your growing operation.


MOUNTING WITH LANCE HANGERS

- Allow an additional 25" from the top of fixture for the length of hanger.
- Locate the 4 eye bolts on the LED fixture and slide the lance hanger clips onto two opposing eye bolts.
- Be sure to hang from the center of the lance hanger.



CONNECTING UP TO 80 LED FIXTURES

A group of up to 40 Luxx Lighting LED fixtures can be connected to both the main RJ9 port and the auxiliary RJ9 port of the controller.

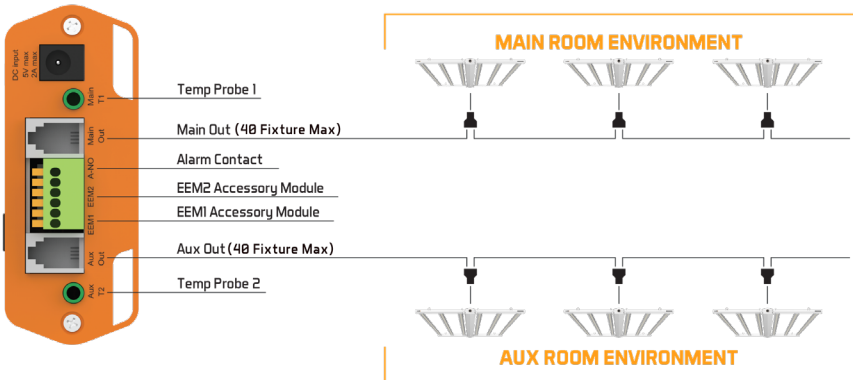

- Switch the rotary knob on all Luxx Lighting LED Fixtures to "EXT" (external control).
- Plug the RJ9 end of one of the provided controller cables into the RJ9 main port of the controller.
- If a two room setup is used or if more than 40 LED fixtures have to be connected, plug a second controller cable in the RJ9 aux port.
- Plug the RJ14 end of the controller cable(s) into the input of a RJ14 splitter. Use an interconnect cable to connect one output of the RJ14 splitter to the RJ14 port of the LED fixture.
- Use an interconnect cable to connect one output of the RJ14 splitter to the input of the following RJ14 splitter.
- Repeat this process to connect up to 40 LED fixtures per group.

GROWING WITH LED'S

BY POETRY OF PLANTS (*IG @poetryofplants*)

When cultivating under LED lighting, a cultivator might be tempted to execute a similar methodology to HPS cultivation. This strategy can lead to frustrating results due to the environmental differences, higher usable lighting levels and subsequent higher photosynthetic rates that stimulate growth with less room for error. The focal point of heat created by a bulb also helps burn off latent load (RH) which doesn't occur with a properly built LED fixture, which diffuses heat into the ambient environment created a more evenness to environment but also can cause higher relative humidity. Also, with LEDs more input energy goes into created light than heat (which is the case with HPS).

This increase in light will stimulate higher photosynthetic rates, leading to higher transpiration rates and a higher demand of feed solution, all of which add more water into the room. When specifying dehumidifiers it's important to match the dehumidification potential with the volume of water added. With LEDs, it is safe to assume that the peak water demand per day will be 1 gallon per sq ft of canopy. Remember this is PEAK water demand, daily water demands will in reality be less and dependent on pot size, cultivar type, and plant age. For example, a 2-week-old plant will require less water than a 6 week-old plant.

PPFD ENVIRONMENT

WEEK	1 FLOWER	2 FLOWER	3 FLOWER	4 FLOWER	5 FLOWER	6 FLOWER	7 FLOWER	8 FLOWER	9 FLOWER
PPFD	450	550	650	750	750-850	850-950	850-950	850-950	850-950
RH	60-70%	65-70%	60-65%	60-65%	60-65%	60-65%	60-65%	50-55%	50-55%
SLT	72f-75f	72f-75f	72f-75f	75f-78f	75f-78f	78f-82f	78f-82f	68f-72f	65f-88f

Because of the higher photosynthetic and growth rates, plants that receive a higher ppfd will require more food. It is recommended when first cultivating under LEDs, for the cultivator to match PPFD levels used under HPS and make gradual increases of both light and fertilizer PPM during subsequent runs. It is also recommended that the cultivator uses a quality PAR meter that measures PPFD (umol) to understand how much light they are giving the plant.

APPROPRIATE BASELINE LIGHTING LEVELS

PHASE	MOTHERS	CLONE	PHASE 1 VEG	PHASE 2 VEG
UMOL	300-600	75-125	125-200	200-300

WEEK	1 FLOWER	2 FLOWER	3 FLOWER	4 FLOWER	5 FLOWER	6 FLOWER	7 FLOWER	8 FLOWER	9 FLOWER
UMOL	200-300	300-500	500-600	600-700	700-750	750-850	850+	850+	850+

HOW TO ASSESS APPROPRIATE PHOTOSYNTHETIC RATES

Use a laser thermometer to measure leaf surface temperature. Under LEDs the leaf surface temperature should be at or around ambient canopy temps (2-3 degrees differential). Transpiration generally cools the leaf surface, so if your leaf surface temp is climbing 2-3 degrees higher than ambient canopy then the light energy is not being turned into phytochemicals (which is desired) and instead is being reflected back as heat (undesired and used to cool down the plant). If the plant is heating up above the ambient temps then you need to dial down the light intensity until the stress is resolved. If this occurs for multiple days, then you should also dial down the fertilizer concentration, feeding the plant more water to help cool without leaving a buildup of salts in the media (which will choke the roots, aka osmotic root pressure). You should also perform daily pour through run off tests to make sure the media isn't becoming acidic and the EC levels are close to solution EC level).

ENVIRONMENT

This LED fixture has an IP66 rating and is designed to be used in a high-humidity environment. Optimal ambient air temperature for this LED fixture is between 15°C-60° F / 26°C-80° F. This LED fixture is NOT intended to be used outdoors and should not be directly exposed to water.

SAFETY RECOMMENDATIONS AND WARNINGS

Please read the following instructions carefully before use, or working with the Luxx 645w LED Pro

- Always adhere to local rules and regulations when installing or using this LED fixture.
- Do not open or disassemble the LED fixture, it contains no serviceable parts inside. Opening or modifying the LED fixture can be dangerous and will void the warranty.
- Do not use the LED fixture when either the LED fixture or its power cord are damaged. Replace the power cord only with original certified cords.
- Modifications to the cords can lead to unwanted electromagnetic interference and will void the warranty and nullify any compliance with legal regulations.
- Always disconnect the LED fixture from mains before performing any maintenance.
- Always allow for a cool down period of at least 30 minutes before touching the LED bars.
- The LED fixture reaches temperatures of 108° F / 40° C. Do not use this fixture near anything flammable or reactive.
- The installation and the use of this LED fixture are the responsibility of the end user. Incorrect use or installation can lead to malfunction and failure of the LED device. Improper use of the LED fixture will void the warranty.

MAINTAINCE

- Do not clean the LED fixture with detergents, abrasives or other aggressive substances.
- Please regularly check the LED fixture for dust or dirt buildup. Clean if necessary. Contamination may cause overheating and decreased performance. Clean the outside of the LED fixture using a dry or damp cloth.
- Regularly check the cable connections of the LED fixture to ensure it is undamaged.

STORAGE AND DISPOSAL

- This LED fixture is to be stored at an ambient temperature of to 15°C-60° F / 26°C-80° F in a dry and clean environment.
- This LED product must not be disposed of as standard waste. It is to be collected or brought to a recycling center for proper disposal and environmental treatment.

WARRANTY

Luxx Lighting warranties the mechanical and electronic components of this LED product and guarantees the materials and workmanship free of defects, if used under normal operating conditions within a period of five (5) years from the purchase date. All returns and claims must be furnished with the original receipt and packaging from the shop purchased. If you find that there are any defects with this product that relate to either the workmanship or the materials but are not due to improper use or user error, Luxx Lighting shall, at its discretion, either replace or repair the product using the appropriate new or reconditioned parts. In the case that Luxx Lighting decides to replace the entire product, the date of the limited warranty shall apply to the replacement from the date of the purchase of the initial product for five (5) years. For any returns or repairs, please refer to the RMA section of the website at www.luxxlighting.com/rma